

Model of Airport Asphalt Pavement Performance Using Microwave Remote Sensing Satellite

^{1*} Mrs. Pragyan Priyadarshini, ² Mr. Binayak Satapathy

^{1*} Asst. Professor, Dept. OF Civil Engineering, NIT BBSR,

Asst. Professor DEPT. of Civil Engineering, MITM, BBSR

^{1*} pragyanpriyadasini@thenalanda.com, binayak_09@gmail.com

Abstract:

In order to monitor the condition of the pavement using microwave remote sensing satellites in close to real time, the goal of this study is to construct a binary logit model of the airport pavement. The relationship between the international roughness index (IRI) of an airport and the backscattering values from PALSAR images of the ALOS satellite was then determined. 390 data in total were used for the analysis. This model could be used to assess the effectiveness of the level of pavement running service at the airport. The investigation revealed a correlation between the backscattering values in the HH and HV polarisations and IRI, with HH polarisation having the strongest correlation ($r = 0.90$). The roughness will rise if the backscattering value in HH polarisation was increased. Following the validation process using another 100 data, a strong correlation of 94.00% was seen in the outcome. So, it can be stated that this model could be used for maintaining airport pavement.

Keywords: Multi-objective optimization, traffic assignment, Pareto optimal solution, user equilibrium, system optimization.

1. Introduction

The primary type of damage to the airport pavement is functional failure. The four condition categories of structural condition, distress or surface condition, safety or skid resistance condition, and roughness condition can be utilised to categorise inspection techniques that can be used to determine the type of damage [Weerakaset and Kamiya, 2010]. The current standard for pavement condition explains how the pavement works or how its condition evolves over time [Hans et al., 2003]. The pavement's ability to accommodate traffic demand within reasonable limits might be referred to as its condition. The roughness characteristics that affect vehicle reaction could be summed up using the IRIs. According to Sayers and Karamihas (1998), these were the best ways to assess the overall operating costs of the vehicle, the ride quality, and the surface condition. International Road Index (IRI) scale and road surface conditions are shown in Figure 1; the IRI for airport pavement should be less than or equal to 2.0. (Sayers et al., 1996). The Present Serviceability Rating (PSR), which is based on individual observation, is likewise related to the IRI. According to the Highway Research Board (1962), PSR is "the judgement of an observer as to the existing ability of a pavement to service the traffic it is supposed to serve." In 1986, Paterson established the link between PSR and IRI using the formula $PSR=5e-0.18(IRI)$ (1)

PSI stands for Present Serviceability Index. IRI stands for the global roughness index.

Al-Omari and Darter (1992) reported the following relationship: $PSR=5e-0.26(IRI)$ (2)

PSI stands for Present Serviceability Index. IRI stands for the global roughness index.

The timing of M&R actions can greatly influence their effectiveness and cost, as well as the overall pavement life from both. Figure 2 shows that the first 75% of pavement life, the pavement condition drops by about 40%. However, it only takes another 17% of pavement life for the pavement condition to drop another 40% [Stevens, 1985; Weerakaset and Kamiya, 2010]. Additionally, it will cost four to five times as much if the pavement is allowed to deteriorate for even two-

to-three years beyond the optimum rehabilitation point. Many techniques using GIS have been developed to determine pavement quality [Terzi, 2007; Grote et al., 2005; Baus and Hong, 1999; Dashevsky et al., 2005; Simonsen and Isacson, 1999], but all techniques could not be applied in near-real time. If we have some technique to evaluate pavement condition in near-real time, it was possible to reduce the cost and monitor the airport pavement more frequently, there would be several benefits. Nowadays using microwave remote sensing technology could be applied such as [Weerakaset and

1.1 ALOS and PALSAR Characteristics

The Advanced Land Observing Satellite (ALOS) revolves around the earth every 100 minutes, or 14 times each day and repeats its path (repeat cycle) every 46 days. The ALOS has three payloads, two optical instruments – the panchromatic remote sensing instrument for stereo mapping (PRISM) and the advanced visible and near infrared radiometer type 2 (AVNIR-2), and the phased array type L-band synthetic aperture radar (PALSAR) for day-and-night and all-weather land observation [JAXA,2008]. The PALSAR is shown in Table 1 which is an active microwave radar using the L-band frequency. It has three modes, namely high resolution, ScanSAR and polarimetric mode. The high resolution mode is used under regular operation and it has a ground resolution of 7m. The ScanSAR mode enables the off-nadir angle to be switched from three to five times (scanning a swath of 70 km) to cover a wide area from 210 km² (70x3) to 350 km² (70x5), but the resolution is inferior to that of the high resolution mode. PALSAR can simultaneously receive both horizontal (H) and vertical (V) polarization per each H and V polarized transmission, called multi polarimetry or full polarimetry (HH, HV, VH and VV polarization). The incidence angle ranges from 8 to 30°. This polarimetric mode was used in the current study [Weerakaset and Kamiya, 2010].

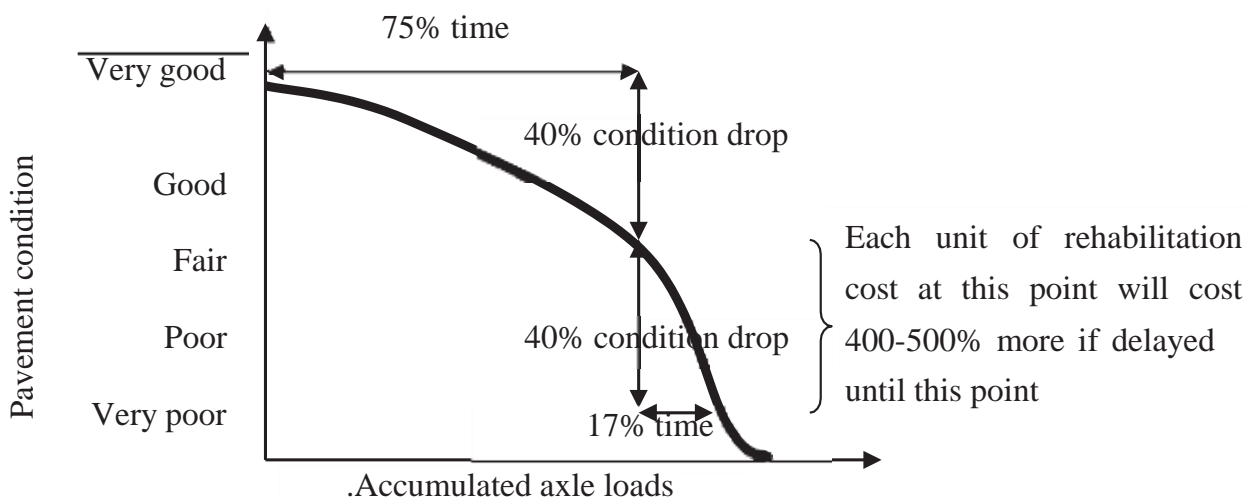
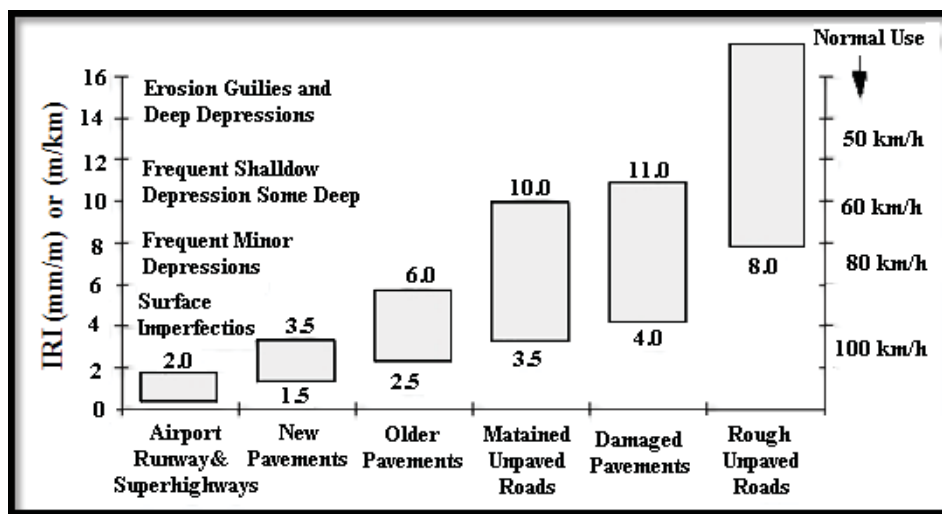


Figure 2. Rehabilitation time versus cost (adapted from Stevens, 1985).

Kamiya, 2010], proposed new approach to monitoring the pavement in Thailand. As refer above then the objective of the study was to determine the relationship between the backscatter- ing data of PALSAR with the international roughness index (IRI) data and to develop a binary logit model for the evaluation of level of airport pavement riding service.

2. Study Area

Suvarnabhumi international airport is shown in Fig- ure 3, is located in Bangkok Metropolitan of central Thailand (Figure 3), which is the responsibility of the Airports of Thailand Public Company Limited (AOT).The study site was at

latitude 14° 26' 56" N and longitude 100° 39' 36" E, which equates to WGS84 format as UTM Zone 47 at 674,836.20N and 1,598,002.01E. Total Area of the airport is 32 mil- lion m2 or 20,000 RAI cover 2 main runways and 2 taxiways.

3. Method and Data

Asphalt pavement performance (APP) model or call the level of riding service was determined using a binary logit (BL) model. Estimation of the param- eters of this model can be carried out easily using the maximum likelihood (ML) method. The dependent variable was the ground-truth IRI data measured by the bump integrator along runway and taxiway. The method involved with developing model as the fol- lowing steps:

1. Calculation of the descriptive statistical values of

Table 1. Details of the PALSAR system (JAXA, 2008).

Mode	Fine		ScanSAR	Polarimetric (Experimental mode)
Center Frequency	1270 MHz (L band)			
Chirp Bandwidth	28MHz	14MHz	14MHz 28MHz	14MHz
Polarization	HH or VV	HH+HV Or VV+VH	HH or VV	HH+HV+VH+VV
Incident angle	8 to 60°	18 to 43°	18 to 43°	8 to 30°
Range Resolution	7 to 44m	14 to 88m	100m (multi-look)	24 to 89m
Observation Swath	40 to 70km	40 to 70km	250 to 350km	20 to 65km
Bit Length	5 bits	5 bits	5 bits	3 or 5 bits
Data rate	240Mbps	240Mbps	120Mbps, 240Mbps	240Mbps
NE sigma zero	< -23dB (swath width 70km)		< -25dB	< -29dB
	< -25dB (swath width 60km)			
S/A	< -16dB (Swath width 70km)		> 21dB	> 19dB
	< -21dB (Swath width 60km)			
Radiometric accuracy	Scene: 1 dB / orbit: 1.5 dB			

IRI and backscattering data: the maximum, minimum, mean and standard deviation values of the IRI data and backscattering data sampled were calculated.

- Building of the utility function of the riding quality choice model (BL model) from the IRI and backscattering data.
- Parameter estimation: estimates were obtained using the maximum likelihood method.
- Goodness of fit test for selection: the backscattering polarization that had the highest McFadden log likelihood ratio index (ρ^2) and the greatest significance by the t-test and sign test was selected to be the most appropriate polarization.
- Validation of the level of riding service model.
- Application of the level of the riding service model to Runway number 19R.

3.1 Input Data

The two PALSAR images which have a resolution of 6.25 m at 15 October 2009 and resolution of 12.5 m at 7 July 2010 were collected. Because of the limited of PALSAR image data then the HH and HV polarization were used in this research. The single path IRI data

along the taxiway (Number TXL-T6 and TXL-T11) and Runway (Number 19L and 19R) were collected from the bump integrator on a moving vehicle as ground-truth data.

Backscattering Data

The two dates of ALOS/PALSAR scenes (ALPSRP198470260-P1.5GUA and ALPSRP239383340-P1.5GUA) were used for analysis with an image resolution of 10.0 m, Figure 4 shows the back scattering image with HH and HV polarization. Both images already have radiometric calibration those were done by JAXA, as normalizing all pixels using the cosine of the incidence angle.

Table 3 shows basic statistics for the backscattering values in HH and HV polarization. For this study area, the average backscattering value and the range in value in the co-polarization plane (HH) was higher than in the cross-polarization plane (HV). Table 3 also shows an advantage of the higher range in values is that there should be a high correlation between co-polarization and the IRI value in the development of a riding quality model.

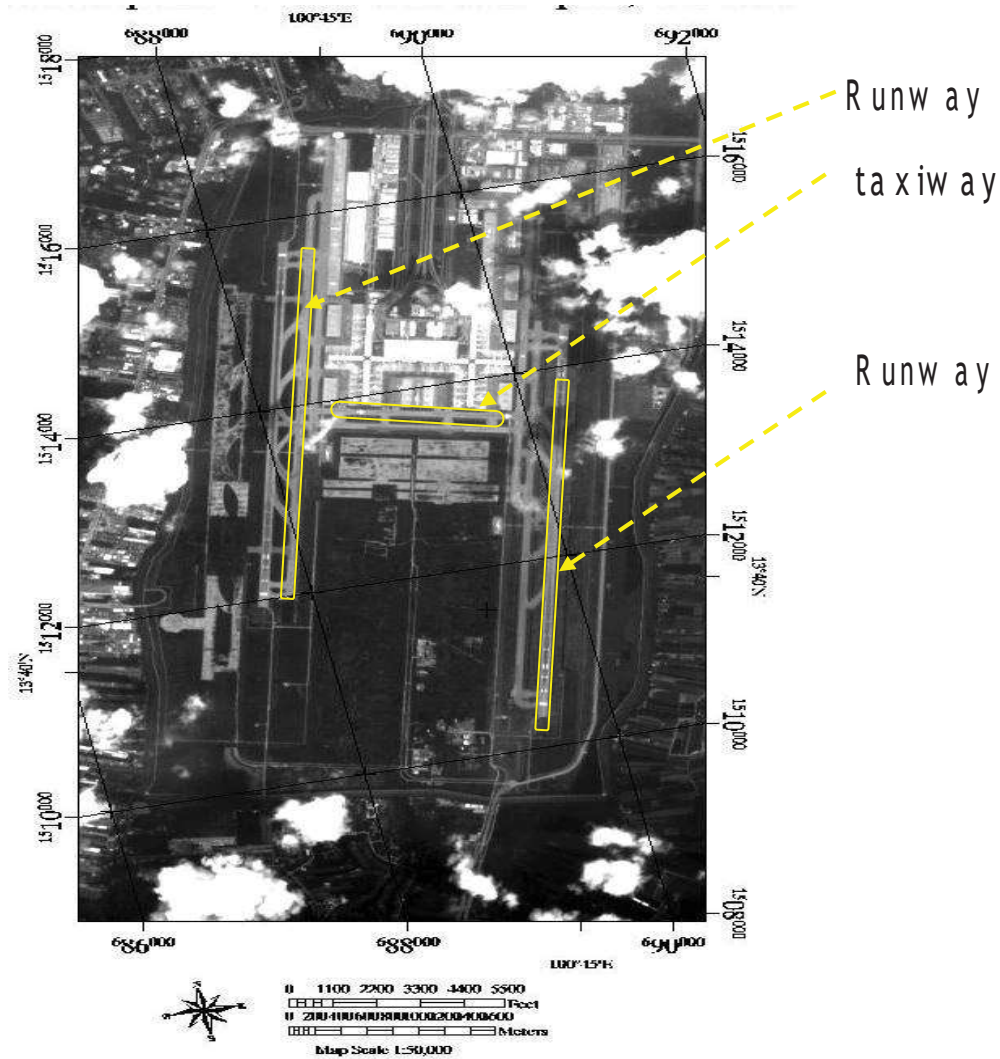


Figure 3. Image of Suvarnabhumi international airport, Thailand, overlaid with region of interest of ACC's airport (yellow boxes).

Table 3. Basic statistical values along the asphalt airport pavement sampled in HH and HV polarization those related with IRI value.

Statistical Parameter	Backscattering Value		IRI (mm/m)
	(unit: DN)		
	HH	HV	
Average	2.00	1.31	1.31
Standard Deviation	0.66	0.66	0.66
Maximum	4.60	4.60	4.60
Minimum	0.50	0.50	0.50
Number of Pixels	195	195	390

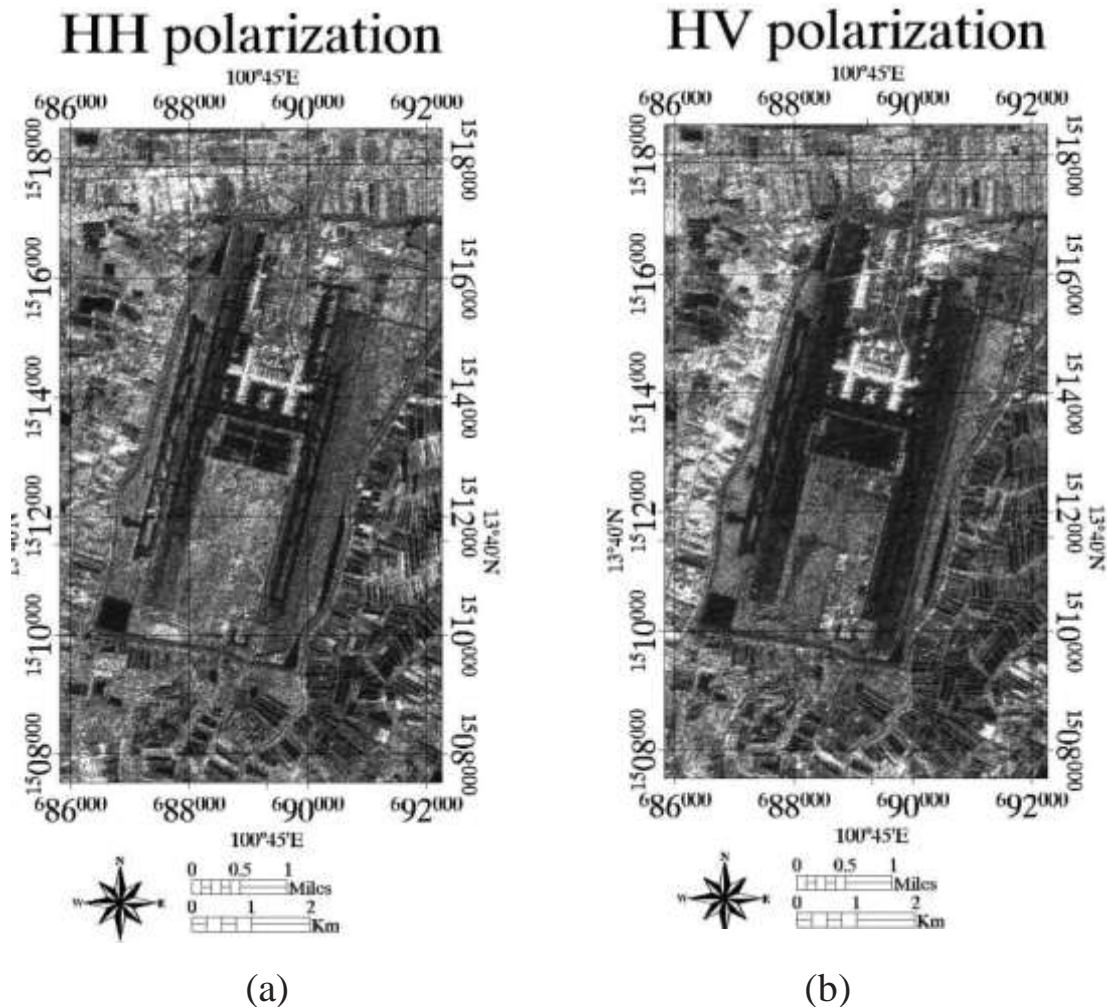


Figure 4. ALOS/PALSAR of Suvarnabhumi international airport image (scene id: ALPSRP198470260-P1.5GUA), with back scattering in the (a) HH and (b) HV.

Table 4. IRI values and associated airport pavement surface condition.

IRI (m/km or mm/m)	Level of Riding Service
≤ 2.0	Good
>2.0	Poor

3.3 IRI Data

Total 390 IRI samples (Table 3) were classified into the level of riding service those adopt from Paterson (1987). The level of airport riding service was separated into two classes (Table 4) following Sayers (1996) scales. A low IRI value indicates a very smooth pavement surface, while a high IRI value means the airport pavement surface is very rough.

4. Results

Level of the riding service on the airport is the result of Binary logit (BL) model, developing BL model was necessary to evaluate which backscattering polarization data had the highest correlation with the IRI, so the relationship between the IRI and backscattering value for each set of polarization data was determined. Figure 5 shows the relationship between the IRI and backscattering value

for HH and HV polarization. It was found that the Pearson correlation in HH polarization ($r = 0.90$) higher than in HV polarization ($r = 0.84$) that was significant at the 0.01 level (two-tailed test). Consequently, this polarization was used as the input parameter in the model.

BL model as the same as ORL with one cut-off level that was developed by reclassifying the level of riding service into two groups, namely good, if the IRI value was less than or equal to 2.0 mm/m, otherwise the quality was classified as poor. The new quality of riding service estimation model was constructed as Eq.(3). This model was significant at the 0.01 level (two-tailed test), the variable β_0 and variable DNHH were significant at the 0.01 level with student's t-test (two-tail).

$$ARQ_{good/poor} = 28.6372 - 0.0149DNHH \quad (3)$$

(t = 3.96) (t = -3.87)

($\rho^2=0.82$, $\chi^2=51.74$, df=1, $p=0.00$)

where: DNHH is the digital number of the HH polarization;

$ARQ_{good/poor}$ is the airport riding quality of service of the good condition with the reference category being the poor condition.

Using this riding quality model, the probability to select the level of riding service could be determined as shown in Eq.(4) (the reference category is the poor condition).

The decision criteria to select the level of airport riding service model were provided using Eq.(5).

$$P_{good}(DNHH) = \frac{1}{1 + \exp[-28.6372 + 0.0149 DNHH]} \quad (4)$$

$$= \begin{cases} \text{good, } P_{good}(DNHH) \geq 0.50 \\ \text{poor, } P_{good}(DNHH) < 0.50 \end{cases} \quad (5)$$

where: DNHH is the digital number of the HH polarization;

LRD is the Level of Riding Quality of service of the airport pavement.

Table 6 shows validation of the binary logit function, after substitution of the digital number (DN) value into the BL model indicated that the model had an accuracy assessment of prediction of the airport level of service equal to 96.41% .

Figure 6 shows the relationship between backscattering and the probability of selection of prediction the service level being good. If the digital value is greater than or equal to 1,922 (28.6372/ 0.0149), then the riding service will be poor.

The application of a BL model of Runway number 19R, involved substitution of the backscattering value (100 samples) into the model for the probability of selecting the good condition, which resulted in the accuracy assessment for the prediction of the highway level of service being 97.00% (Table 7).

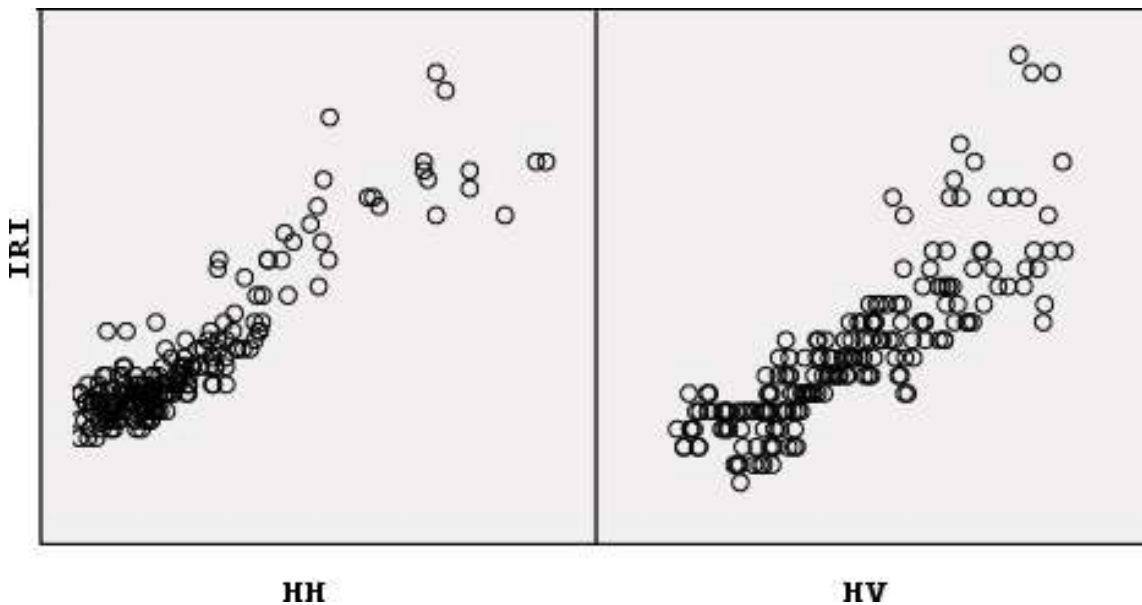


Figure 5. Relationship between IRI and backscattering values for each set of polarization data: HH (left) and HV (right). Note ** = correlation significant at the 0.01 level (two-tailed test).

Table 6. Classification results of level of riding quality model (binary logit model).

Observed	Predicted		Percentage of Successive Prediction
	Poor	Good	
Poor	28	4	87.50
Good	3	160	98.16
Overall percentage	15.89	84.10	96.41

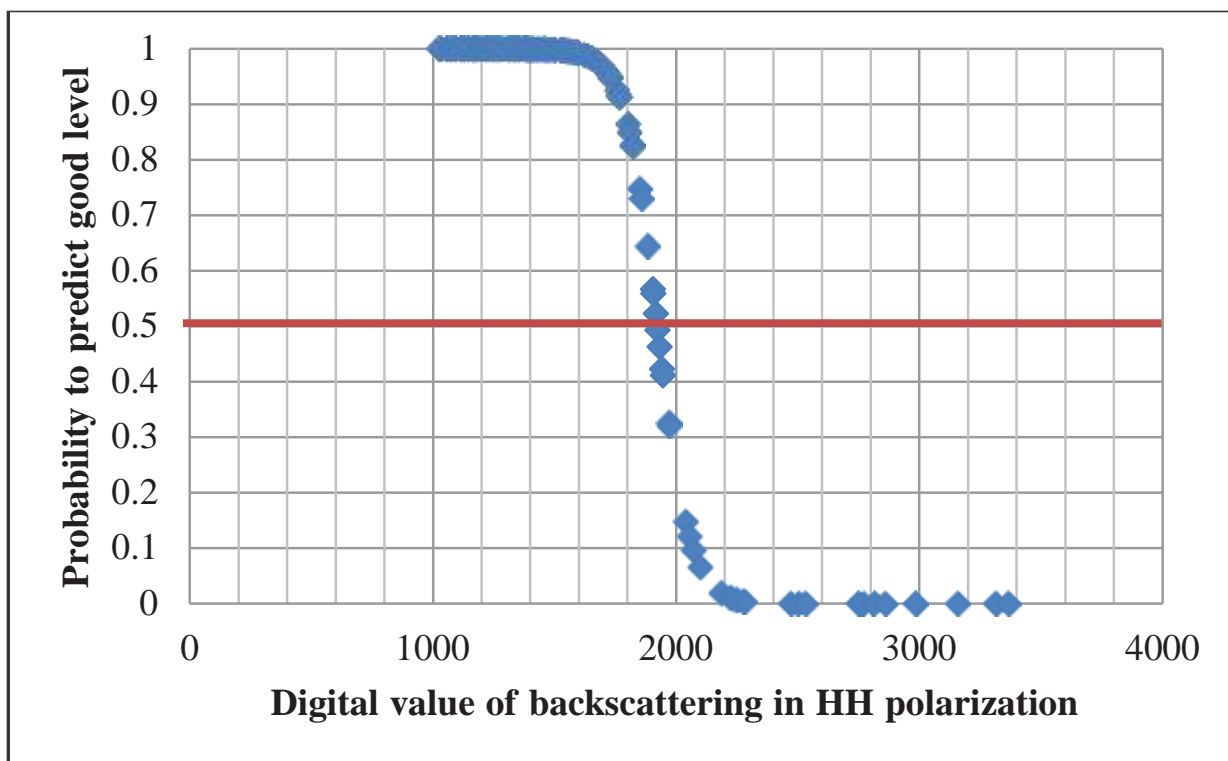


Figure 6. Relationship between backscattering and probability of selection of riding service level = good.

Table 7. Classification results using the level of riding quality model of Runway NO.19R (100 samples).

Observed	Predicted		Percentage of Successive Prediction
	Poor	Good	
Poor	22	4	84.62
Good	2	72	97.30
Overall percentage	24.00	76.00	94.00

5. Discussion and Conclusion

This paper presents the new method to know the performance of airport asphalt pavement via the BL model by using backscattering value of HH polarization of PALSAR image. The accuracy of the model

was 96.41%. The analysis showed that an increase on the backscattering value both in HH and HV polarization indicated a poor condition of the pavement surface. The HH polarization was appropriate variable for developing performance or BL model. From the

probability function of the BL model, if the DNHH value were greater than or equal to 1,922 (28.6372/ 0.0149), then the riding quality would be poor. The models developed were applied to analyze Runway number 19R (100 samples), it was found that the accuracy assessment for the prediction of airport pavement performance's level equalled 94.00%. The current study developed the relationship between IRI and satellite data in terms of a mathematical model. Further study should be carried out to develop a physical properties model to explain this relationship. For more intensive investigation must be carried out using PALSAR images with IRI data in various seasons, incident angle and especially various frequencies (X, S or C band). For more precise proposed models, should to verify the proposed model by using airborne Synthetic Aperture Radar image (AirSAR).

6. Acknowledgements

The authors thank Dr.Wathinee Krisanapant and Miss. Patraporn Mutchachoum and the authority of Airports of Thailand Public Company Limited (AOT) , for providing the IRI data and acknowledge the support of the Japan Aerospace Exploration Agency (JAXA) in providing the PALSAR data.

7. References

- Al-Omari, B. and Darter, M.I. (1992) "Relationshipsbetween iri and psr, report number uilu-eng-92-2013", Springfield, IL: Illinois Department of Transportation.
- Baus, R.and Hong, W. (1999) "Investigation and evaluation of roadway ride ability equipment and specifications", Federal Highway Administration/South Carolina Department of Transportation Report FHWA- SC-99-05, Columbia, South Carolina
- Benedetto, A.and Pensa, S.(2007) "Indirect diagnosis of pavement structural damages using surface GPR reflection techniques", Journal of Applied Geophysics, 62(2), pp. 107-123
- Dashevsky, Y. A., Dashevsky, O. Y., Filkovsky, M.I.and Synakh, V. S. (2005) "Capacitance sounding: a new geophysical method for asphalt pavement quality evaluation", Journal of Applied Geophysics,57(2), pp.95-106
- Grote, K.,Hubbard, S.,Harvey J. and Rubin Y. (2005) "Evaluation of infiltration in layered pavements using surface GPR reflection techniques", Journal of Applied Geophysics 2005,pp 129-153.
- Hans, Z., Ryan, T., Shauna, H., Reg, S. and Sitansu, P. (2003) "Use of LiDAR-based elevation data for highway drainage analysis: A qualitative assessment", Paper presented at the Proceedings of the 3 Mid-Continent Transportation Research Symposium, Ames, Iowa, p. 1-19
- JAXA (2008) "advanced land observing satellite website", Available at: http://www.alosrestec.jp/aboutalos_e.html, cited: [Accessed 2 Sep 2011]
- Paterson, William D. O. (1987) "Road deterioration and maintenance effects models for planning and management", The Johns Hopkins University Press, Baltimore and London.
- Sayers, M.W., and Karamihas, S.M. (1998) " Basic information about measuring and interpreting road profile, the little book of profiling", University of Michigan.
- Sayers, M.W. and Karamihas, S. M. (1996) "Estimation of rideability by analyzing longitudinal road profile" , Transportation Research Record, 1536

-Simonsen, E. and Isacsson, U. (1999) “Thaw weak- ening of pavement structures in cold regions. Cold Regions Science and Technology”,ed.29(2), pp. 135- 151

-Stevens, l. b. (1985) “road surface management for local government”, Publication No. DOT-I-85-37, Fed- eral Highway Administration, Washington, D.C.

-Terzi, S. (2007) “Modeling the pavement serviceability