

A Cold Forging Review

Deepak Kumar Sethy	Assistant Professor, Nalanda Institute of Technology, Bhubaneswar
Soma Dalbehera	Associate Professor, Nalanda Institute of Technology, Bhubaneswar

ABSTRACT

Cold forging is a process in which the shape of metal is changed, by mechanical forces only, using the ductile properties of metal such as pressing, squeezing, or hammering forces. In forging, a metal work piece is plastically deformed, at ambient temperatures. The modular system to control material flow during cold forging processes by additional hydraulic axes using different process variables as well as the appropriate process and equipment technology is presented in this contribution. It has been shown that due to the controlled movements of the tool components both the robustness of the forming processes and tool loads in conventional cold forging process are controllable leading to enhancement of forming limits. Tip test and T-shape compression test are used to determine friction measurement in cold forging which are used to analyze property of materials.

*Corresponding author e-mail: deepakkumar@thenalanda.com

KEYWORDS : Cold forging; pressing; squeezing; metal work; hammering; ambient temperature; tip test; T-shape compression test.

1 INTRODUCTION

Cold forging is a procedure in which only mechanical forces are used to alter the shape of metal. In forging, pressing, squeezing or hammering forces are used to plastically deform a metal work piece. The material must have enough flow and ductile characteristics to facilitate forging. Net-shape or almost net-shape components, such as shafts, axles, bolts, gears, and joints, can be produced at a reasonable cost through forging. Almost all metals are forgeable. As a result, goods with the highest structural integrity are now accessible in a wide variety of physical and mechanical properties. In high dependability applications, where tension, stress, load, and safety are crucial factors, forgings are used. Also, they work in a variety of difficult conditions, such as extremely caustic, high temperatures, and high pressures.

utilising AL6061-O and 2024-O specimens, the surface roughness was changed from Ra =0.61 m to Ra =0.08 m. In the studies, four different lubricants were employed, including grease, frying maize oil, VG32, and VG100. [4]

Forward extrusion can be used to assess friction in cold forging as a practical industry procedure. because after the die zone has been filled with metal, the friction force generated along the surface of the container decreases with the length of the billet. The slope of the decreasing stroke-load curve of extrusion can then be used to calculate friction factor m, also known as friction coefficient. Forward extrusion process is T-shape compression test. Forward extrusion can be used to assess friction in cold forging as a practical industry procedure. because after the die zone has been filled with metal, the friction force generated along the surface of the container decreases with the length of the billet. The slope of the decreasing stroke-load curve of extrusion can then be used to calculate friction factor m, also known as friction coefficient. Forward extrusion process is T-shape compression test.

The system's potential to increase process resilience and tensile stresses in the cup wall has been explored using the traditional backward cup extrusion method with a controllable counterpunch (Fig. 1). The bottom height of the press cup, which must be maintained within extremely tight dimensional tolerances while process input variables are changing, is selected as the objective for the robustness study. This experiment explores the general potential for automating cold forging processes. Thin tabular semi-finished parts with acceptable mechanical qualities are made of high strength steel suitable for lightweight applications before they be cost-effectively manufactured using a regulated counterpunch and

HISTORY

Forging is one of the oldest known metalworking processes. Traditionally, forging was performed by a smith using hammer and anvil. The cold forging process was developed in Germany just after the end of World War II. It was used to produce artillery shells and other ordinance items for the war. After the war, a number of firms in the United States picked up the idea. At first, most of the work here was concentrated on shell manufacture, but it didn't take long for the firms to realize the possibilities of cutting costs in the manufacturing of consumer goods.[5]

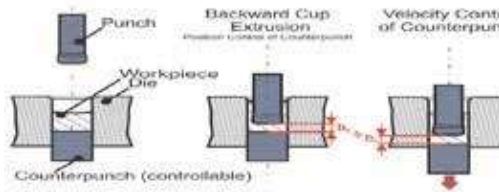


Fig. 1. Sketch of backward cup extrusion with controllable counterpunch

The tip was created using a backward extrusion technique with a cylindrical specimen whose diameter was lower than the cylindrical die's diameter and greater than the punch's diameter. As a result, the bottom die's side wall was hit by the bulged surface, which caused the initial deformation mode to be upsetting before switching to backward extrusion later. In the normal and shrunken tip tests shown in this figure, the original specimen's diameter and height were 30x15 and 10x5 mm2, respectively.

By the early fifties, the process had attracted attention from car and truck manufacturers and was being used to produce automotive parts such as brake light receptacles and spark plug bodies. It was a process that could be economically applied to almost any symmetrical part made in large quantities. More than 500,000 tons of steel parts were manufactured by cold extrusion in 1969. By comparison, in 1950 the total was about one tenth of that. [5]

Due to the energy crisis in the 1970's, researchers worked intensely to improve material usage, reduce forging energy, and eliminate machining processes with high precision forging. Since problems such as environment pollution and noise level have become more prevalent, engineers have been researching hydraulics to find the optimum process to take the billet to the final product. Technology has focused on closed die forging and steels designed for cold forming. Closed-die forging technology improves the yield of ma-

Because to a lack of upsetting mode in the beginning, the tip cannot be created using a specimen with the same diameter as the bottom die. To further understand how the surface roughness of the bottom die acting as the counter punch affected the friction behaviour and material flow in the tip test

material usage with the optimal process having no flash and reduced chip test, centering should be carefully monitored to achieve axial-symmetric deformation. However, it was not easy to perfectly maintain axial-symmetry in experiments. When the specimen, including cutting, lathing and polishing, etc., was not carefully prepared, the edge might be damaged. In this case, the tip was not sharp enough to get precise measurement. To overcome these difficulties of axial-symmetry and measurement, tip distances were measured at four different points for each sample and were arithmetically averaged.[2]

2 EXPERIMENTAL STUDY
TIP TEST FOR MEASUREMENT OF FRICTION

Downsized tip test was performed with an experimental setup as shown in Fig. 2. To apply the force to the workpiece, an MTS machine was used with a maximum load of 100 kN. The forming stroke applied was 3.2 mm and 3.5 mm for AL2024 and AL6061-O, respectively and constant ram speed of 0.1mm/s was applied during the test.[4]

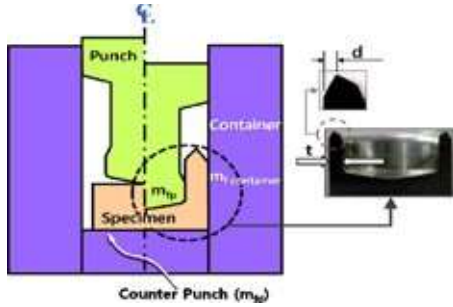


Fig. 2. Schematic of the tip test

To prepare the specimen, commercial AL2024 and AL6061 bil turned to be a cylindrical bar of 12 mm of diameter and 150 mm height. After turning, they were heated from room temperature to 415°C and kept at this temperature for three hours. The specimens were cooled at a heat extracting rate of 30°C/min until reaching 260°C, and finally exposed to air-cooling until reaching room temperature. In order to guarantee uniformity of the test results, enough number of bars was annealed at the same time to avoid material property variation depending on annealing. They were cut into 10 mm length to make a tip test specimen of 10 mm of diameter and 5 mm of height after heat treatment. The dimension of the specimen was measured with vernier callipers to reduce the influence of size difference of the specimen on measurement results of the tip test.[4]

The deformed specimen can be used for measuring the tip distance as shown in Fig.2 with an optical microscope which has a special feature of extended focal imaging function to integrate pictures at different focuses. The deformed tip distance was measured at 36 different points because of measured scattering data.[4]

Another important issue for controlling the lubrication is the surface cleanliness. Before applying four kinds of lubricants (grease, cooking corn oil, VG32, and VG100), the following cleaning process was used. At first, the surface of the punch was cleaned by a wiper soaked with acetone to avoid adhesion among the lubricants. Acetone is a solvent for lubricants, hence it is a residue of acetone on the surface of the punch and die, which unexpectedly affect lubrication performance. To remove this acetone after surface cleaning, forced air blow was applied to the surfaces by employing a hair dryer. After cleaning, the lubricant was brushed manually.[4]

the environmental factors affect the measured data, the experimental condition of surface conditions of the specimen and dies, lubricant, temperature, humidity, and deformation speed was maintained during the test. Six experiments were carried out for each lubricant. The maximum stroke was limited up to 3.5 mm for each experiment because of capacity of the testing machine.[2]

tip test, centering should be carefully monitored to achieve axial-symmetric deformation. However, it was not easy to perfectly maintain axial-symmetry in experiments. When the specimen, including cutting, lathing and polishing, etc., was not carefully prepared, the edge might be damaged. In this case, the tip was not sharp enough to get precise measurement. To overcome these difficulties of axial-symmetry and measurement, tip distances were measured at four different points for each sample and were arithmetically averaged.[2]

T-SHAPE COMPRESSION TEST FOR MEASUREMENT OF FRICTION

T-shape compression includes three parts: punch, cylindrical specimen and die with a V-groove, as shown in Fig.3. The sectional shape of a formed part is 'T-shaped', hence the test is named T-shape compression. In this test, the specimen is first located in the groove as shown in Fig.3(a). During deformation by the top punch, some metal is extruded into the groove and some is upset and moves sideways between the flat surfaces (see Fig.3(b)). The friction force, generated along the wall of groove, restricts metal flow into it, so the height of the extruded part changes with different friction conditions. In addition, this test is well to evaluate the ability of the lubricant. For solid lubrication condition, the cylindrical surface of the specimen was coated with zinc phosphate and soap layer, contact with die and punch directly. For the oil lubrication condition test, the V-groove is filled with the lubricant, so the billet surface is easily lubricated during the test.[3]

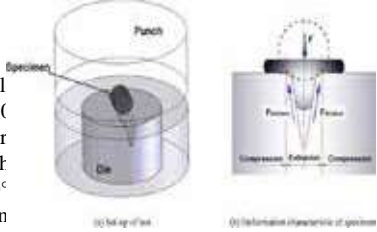


Fig.3 the principle of T-shape compression

Effect of friction condition on load and formed part shape

The whole deformation of specimen in T-shape compression includes

- In the first stage, the metal is pushed into the die groove and no lateral expansion appears between the punch and flat-top surface of specimen to small contact area between specimen and punch. Also it can be observed that the load changes almost linearly with punch stroke when the ratio of punch stroke to billet diameter increases from 0.15 to 0.43 (see Fig.4).
- In the second stage, the contact region of specimen/punch becomes larger, when the compression of metal occurs between the flat surfaces of specimen, so load will increase sharply.[3]

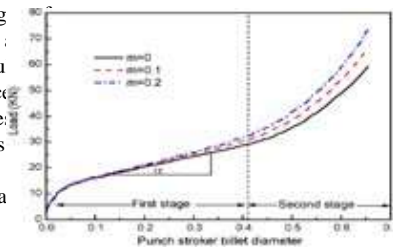


Fig.4 Load curves with different friction factors

Load curves with different friction factors are shown in Fig.4. Results illustrate that the load increases with friction factor and the sensitivity of load to friction factor becomes larger at a higher

punch stroke. This is because contact area and contact between specimen and die become large with the punch moving. Thus, the friction increases. Furthermore, in the first deformation stage, the slope of load curve $k = \tan \alpha$ (see Fig.4), changes with friction factors. Hence, it is a convenient means for determination of friction condition.[3]

AUTOMATICALLY CONTROLLED (COLD) FORGING PROCESS Manufacturing Equipment for Automatic Control of Additional Tool Axes

A tool set developed at IFU enables the integration of one additional hydraulic tool axis with a maximum stroke of 100 mm and a speed of 100 mm/s. The maximum force of the controllable hydraulic axis amount at 500 kN. The hydraulic power unit and the control pumps and servo valves enable the provision of a flow rate of 460 l/min at a maximum pressure of 280 bar suitable for many cold forging processes. The control and the parameterization of the tool kinematics were developed by press Control Electronics and are equipped with a user friendly interface. It provides communication between the hydraulic unit, servo valves, hydraulic axes and the measured variables during cold forging and the automatic control of hydraulic toolaxes and the forming process respectively.[1]

The system for automatic control of cold forging process build up in the lab area of institute (Fig. 5).

Counterpunch Stroke	Magneto-Strictive
Punch Stroke	Magneto-Strictive
Hydraulic Unit	
Max. Pressure	315 bar
Max. Flow Rate	460 l/min
Connected Load	250 kW
Servo Valves	4

Measuring equipment shown in Table 1 used for monitoring desired displacement and strokes respectively. Desired reproducibility of cup bottom height necessitates suitable resolution of measuring equipment. In case of magneto-strictive measuring of punch and counterpunch stroke axis resolution of 5 μm is achievable. For the experimental tests the reversible backward cup extrusion tool set has been mounted on double-action tool rack with integrated double-action hydraulic cylinder and integrated stroke measurement. Distance between punch and counterpunch nose or cup bottom height respectively has been parameterized using a reference system. Piezoelectric load cells have been placed between counterpunch and double-action cylinder and die and pressure pads respectively. Initial measurement of load cells has been mounted condition using a reference load cell.[1]

3 TRENDS IN COLD FORGING

Process Comparison

(A) Conventional manufacturing \rightarrow Drilling
Disadvantage: High material volume.

(B) Alternative manufacturing: Hollow forging without drilling
Advantage: Minimized material usage \rightarrow resource efficient production.



Fig.5. Hydraulic unit with valve bloc, hydraulic press with and control unit

Table 1. Tool set and technical specifications of experiment equipment

Measuring Equipment	
Punch Load	Strain Gauge
Die Load	Piezoelectric
Counterpunch Load	Piezoelectric
Punch Load	Magneto-Strictive

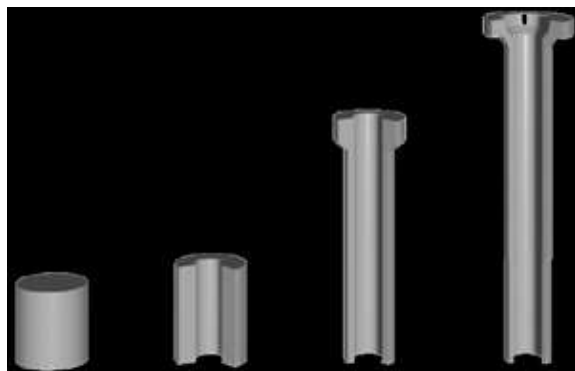


Fig.6. Hollow Forging Hollow Transmission Shaft

- Hollow shaft for double clutch transmission
- Manufacturing sequence includes
Cold forging
Machining
- Hollow shape impossible to manufacture by machining only



Fig.7. Transmission Shaft Hollow Pinion

- Cold forged pinion with hollow conical head and shaft
- light weight design, Constant wall thickness
- With forged inside hexagon at the end of the shaft



Fig.8. Hollow Pinion
4 RESULT AND DISCUSSION
TIP TEST

The tip test can be used for determining the friction effect relative surface quality between the punch and bottom dies. The properties obtained by the compression tests. The maximum values were dependent on the type of lubricants applied.

In Fig.9, the measured tip distance was plotted with the measured values for various lubrication conditions in the downsized. In this figure, the tip distance and maximum load were dimensionalized by the tip thickness $t=1.21$ mm and 10^6 respectively. This test result shows a slope shift from the negative to the positive which is corresponding to the conventional conversion was obtained by changing surface roughness of the punch from $Ra = 0.61 \mu\text{m}$ to $0.08 \mu\text{m}$ for AL6061-O specimen. This is valid for the AL2024-O tip test result as shown in b.[4]

Thus, Ra reduction in the counter punch relative to the influenced the slope of linear relationship between the dimensionalized tip distance and maximum load. Friction factor ($x = m_{fs}/m_{fp}$) was determined to be dependent on the roughness ratio between the punch and counter punch. These for AL6061-O and AL2024-O were 0.45 and 0.60, respectively. To characterize friction factors at both interfaces at the punch-counter punch, the friction at the sidewall was assumed to be the same as the one of the counter punch.[4]

T-SHAPE COMPRESSION TEST

Fig.10 shows the load curves obtained using the three different lubrication conditions. It can be seen that the forming load from mixed lubrication is a little lower than that from solid lubrication. The load using oil is the largest one because the lubricant is squeezed out of the contact zone by the specimen/tool pressure. As metal-to-metal contact occurs, which induces the large friction. On the contrary, with solid lubrication, the phosphate and soap coating can suffer large normal pressure. Hence a solid layer remains between tool and specimen, which can promote a low friction coefficient. For the mixed lubrication condition, the load curve is similar to the solid lubrication condition. Therefore, the load curves of mixed and solid lubrication condition are similar.[3]

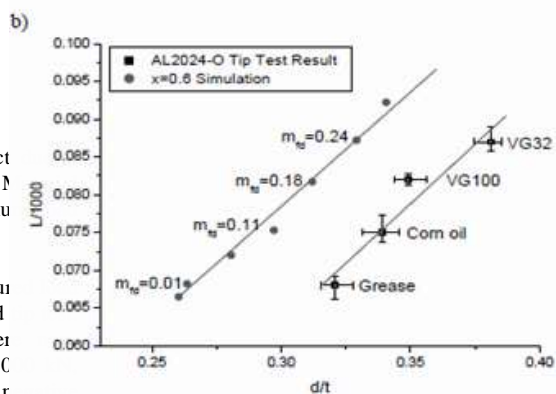
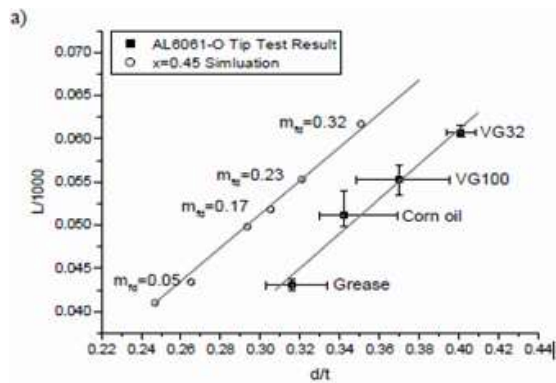


Fig.9. Non-dimensionalized maximum load versus tip distance for a) AL6061-O and b) AL2024-O

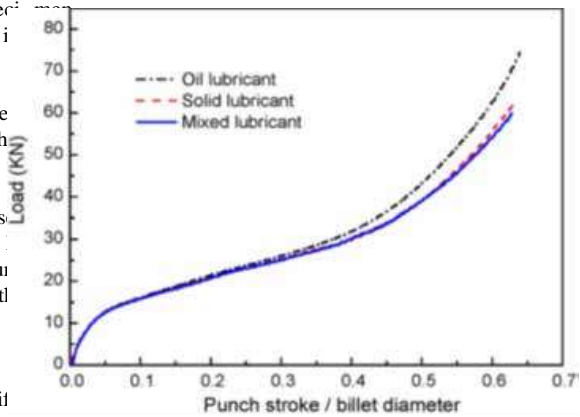


Fig.10. Load curves under different lubrication conditions

AUTOMATICALLY CONTROLLED (COLD) FORGING PROCESS

Automatically controlled (cold) forging process, tool set with hydraulic axis has been used. Raw parts have been machined with EN AW 1050, shot blasted, coated with zinc stearate. Punch diameter has been chosen as Diameter 16 mm and die diameter was 20 mm. Before the punch touches the raw part counter punch has been pre-pressed to compensate system response time. Maximum forces of punch and die depending from velocity ratio are depicted. It is remarkable, that no force equilibrium is calculable due to the fact that maximum forces are not at the same stroke in any case.

5 CONCLUSION

It has been discovered that the tip test can be used to distinguish between the effects of different forming conditions, such as surface roughness, deformation speed, and the different kinds of lubricants and materials on friction. The x ratio and slope between the tip distance and maximum load fluctuate in response to the counterpunch's surface roughness. The slope changed from positive to negative when the counterpunch's surface roughness increased relative to the punch's surface roughness. The slope is discovered to be positive, though the counterpunch's surface roughness is substantially less severe than the punch's.

The T-Shape Compression Test yields the following conclusions:

1. This test results in a complex deformation path, high contact pressure, and relatively high surface expansion.
2. In this test, as corner radius and die V-groove angle increase, the sensitivity of the load curve slope to friction condition diminishes.
3. The oil can be easily squeezed out of the high pressure contact zone, but the solid lubricant has lower friction than oil lubricant. Solid and mixed lubricants perform lubrication in a manner that is comparable.

According to Automatically Controlled (Cold) Forging Process Using a controllable counterpunch punch loads can be reduced in case of an ideal velocity ratio of punch and counterpunch velocity can be chosen. Depending on chosen velocity ratio α , a significant reduction of punch force or punch load respectively is possible using described system.

REFERENCE

- [1] M. Liewald, T. Schiemann, C. Mletzko, Automatically controlled (cold) forging process, *Procedia CIRP* 18, p.p.- 39 – 44, 2014. |
- [2] K.H. Jung, H.C. Lee, D.K. Kim, S.H. Kang, Y.T. Im, Friction measurement by the tip test for cold forging, *Wear* 286– 287, p.p.- 19– 26, 2012
- [3] Q. Zhang, E. Felder, S. Bruschi, Evaluation of friction condition in cold forging by using T-shape compression test, *Journal of Materials Processing Technology* 209, p.p.-5720–5729, 2009
- [4] K.H. Jung, H.C. Lee, S.H. Kang, Y.T. Im, Effect of surface roughness on friction in cold forging, *Journal of Achievements in Materials and Manufacturing Engineering*, VOLUME 31, IS- SUE 2, December 2008
- [5] <http://www.cold-flow.com/cf/category/coldforginghistory.html>. [3 March, 2015]
- [6] <http://en.m.wikipedia.org/wiki/forging> [3 March, 2015]

